

Ek' abeke ;B

;B

755

755

;B

363E Ea5

;B

;B

8? 763


8:F

8? 763

8:F

• E@ \$+ ' "'

• ;75 FD (\$%" ^S_ TVS)

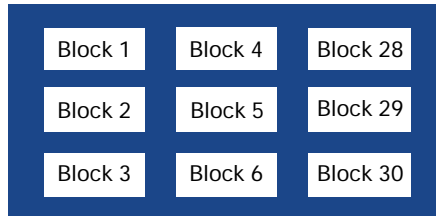


Assign FIT rates of sub-blocks (up to 30)


Applying Failure Rate Lambda Values from IEC TR 62380



Used for IP without technology information, e.g. RTL Controllers



;B Ek` abeke \$(\$(\$ 3E;> Ea5 E9EŽGHESsd Ek` abeke 6Wë[Y` I SdW;B Ek` abeke;B ;EA \$(\$(\$;EA

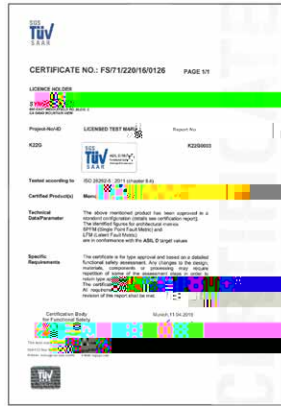

) Ek` abeke;B ;EA \$(\$(\$

Ek` abeke 3E;> ;EA \$(\$(\$ 6Wë[Y` I SdW;B % Ek` abeke ;B
ek` abekežĵa_!|bžSgfa_af|hW

DesignWare IP	ASIL
3D5 7? E7B	3E;> 6
3D5 7?	3E;> 6
7H	3E;> 6
#(885	3E;> 6
EF3D	3E;> 6
EF3D	3E;> 6
	3E;> 6
CaE 3H4!FE@	3E;> 4
B5; 7j bdVëe &ž' B5;WV%ž# #(885 B: K	3E;> 4
GE4 %ž'	3E;> 4
>B66D& ? g'f[B: K h\$	3E;> 4
? ;B; 5E;ž\$ #(885 B: K	3E;> 4
;B	

% Ek` abeke 3E;> ;EA \$(\$(\$;B

EA \$((\$
Ea5 Ea5 :B
Ea5 :B
:B
Ek' abeke
6D5 :B
:B :B
UgdbW f :B
:B
:B
WUfcb_ [YcSf[a`
:B
Ek' abeke 96E: e
37 ZC# dd